


Pin.No	Symbol	Level	Function
1	VSS	---	GND(0V)
2	VDD	---	Power Supply (+5V)
3	V0	---	Operating Voltage for LCD
4	RS	H/L	H: data : L: Instruction code
5	R/W	H/L	H: read : L: write
6	E	H/L	Enable Signal
7-14	DB0-DB7	H/L	Data Bus
15	A	---	Power supply for LED backlight (+5V)
16	K	---	Power supply for LED backlight (-)

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Min	Type	Max	Unit
Operating Voltage	VDD	4.7	5.0	5.2	V
LCD Operating Voltage	VDD-V0	-	4.9	-	V
LED Voltage	VLED	4.8	5.0	5.2	V
LED Current	ILED	220	230	240	mA

Description	
1	DISPLAY TYPE: STN/POSITIVE YELLOW-GREY; (STN/NEGATIVE BLUE).
2	Viewing Direction: 6 O'CLOCK.
3	Polarizer Mode: Transflective/Positive
4	Color of Backlight: Yellow/Green; White
5	Operating Temp: -0° ~ 50°C
6	Storage Temp: -10° ~ 60°C
7	Character Table: Japanese/European/Gytille

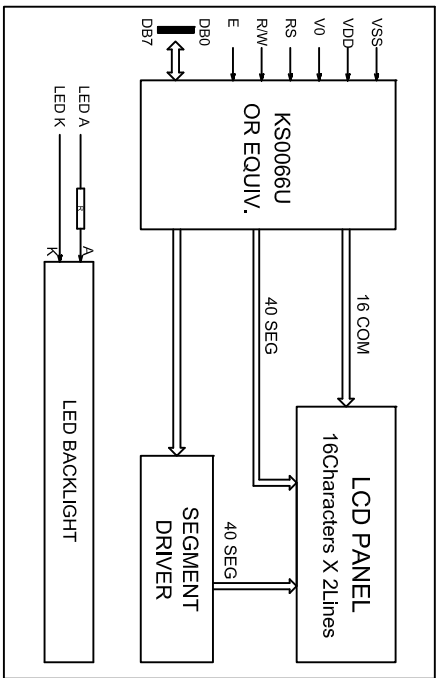

REVISION RECORD		SHENZHEN ET TECHNOLOGY CO.,LTD.	
1	DATE	Http://www.aastet.com	E-mail: east@easet.com
1	10.04.08	TITLE: LCM OUTLINE DIMENSION	GEN.TOL.: ±0.2
2		Model No.: ET-C1602BV1	PRO.(3):
3		Part No.: SPEC-C1602BV1	VER.: A
4		DRAWN HWX	DATE 10.04.08
5		CHECKED 黄卫星	DATE 10.04.08
6		APPROVED	DATE