
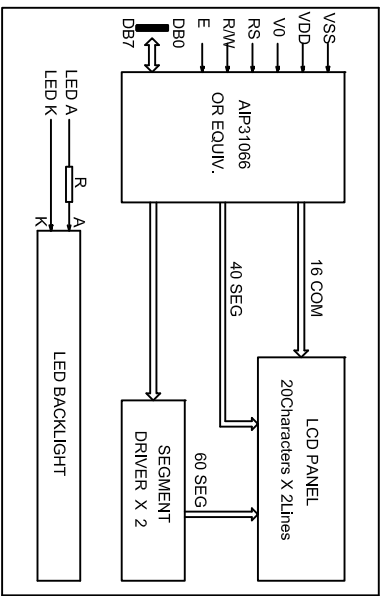


Pin No	Symbol	Function
1	VSS	GND
2	VDD	Power Supply
3	V0	Operating Voltage for LCD
4	RS	H: data : L: Instruction code
5	R/W	H: read : L: write
6	E	Enable Signal
7-14	DB0-DB7	Data Bus
15	A	Power supply for LED backlight
16	K	Power supply for LED backlight

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Min	Type	Max	Unit
Operating Voltage	VDD	4.8	5.0	5.2	V
Operating Current	IDD	-	-	-	mA
LED Voltage	VLED	2.8	3.0	3.2	V
LED Current	I LED	-	TBD	-	mA

- Description
- DISPLAY TYPE: STN/POSITIVE YELLOW-GREEN;
 - Viewing Direction: 6 O'CLOCK.
 - Polarizer Mode: TRANSPARENT
 - Color of Backlight: YELLOW-GREEN.
 - Operating Temp: -20° ~ 70°C.
 - Storage Temp: -30° ~ 80°C.
 - Driving condition: 1/16Duty, 1/5Bias, Vop=4.5V, Vdd=5.0V



REVISION RECORD		DATE	DATE
1			
2			
3			
4			
5			
6			

1	HTT P:// www.abbtel.com	SHENZHEN ET TECHNOLOGY CO.,LTD.	E-mail: east@eastel.com
2	TITLE: LCM OUTLINE DIMENSION		GEN.TOL.: ±0.2
3	Model No.: ET-C2002CV1		Pro.(3):
4	Part No.: SPEC-ET-C2002CV1		VER.: A
5	DRAWN OY	DATE 2011.07.07	SHEET: 1/1
6	CHECKED	DATE	UNIT: mm
	APPROVED	DATE	SCALE: 1:1



A

B

C

D

1

2

3

4

5

6

7

8

1

2

3

4

5

6

7

8