由 Autodesk 教育版产品制作

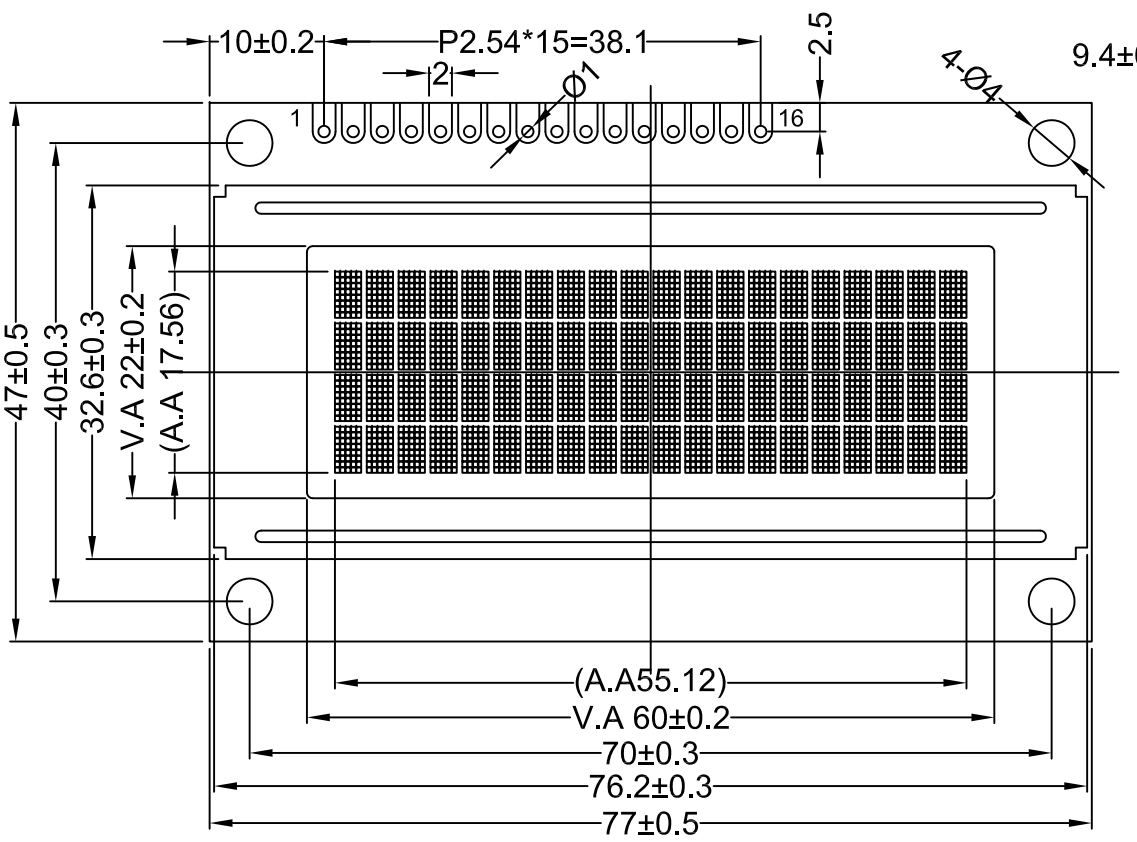



detail dots 2:1

Pin.No	Symbol	Level	Function
1	VSS	—	GND(0V)
2	VDD	—	Power Supply (+5V)
3	V0	—	Operating Voltage for LCD
4	RS	H/L	H: data ; L: Instruction code
5	R/W	H/L	H: read : L: write
6	E	H/L	Enable Signal
7-14	DB0--DB7	H/L	Data Bus
15	A	—	Power supply for LED backlight (+5V)
16	K	—	Power supply for LED backlight (-)

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Min	Type	Max	Unit
Supply voltage logic	VDD	4.8	5.0	5.2	V
Operating Current	IDD	-	1.5	1.8	mA
LCD Operating Voltage	VDD-V0		4.5		
LED Voltage	VLED	4.8	5.0	5.2	V
LED Current	ILED	-	45	-	mA

Description
1.DISPLAY TYPE: STN/POSITIVE YELLOW-GREEN (STN/NEGATIVE BLUE) .
2.Viewing Direction: 6 O'CLOCK.
3.Polarizer Mode: Transflective (Reflective,Transmissive).
4.Color of Backlight: Yellow/Green(White).
5.Operating Temp: 0° ~ 50°C.
6.Storage Temp: -10° ~ 60°C.
7.Character Table: English; Japanese: Europear; Cyrillic.
8.Operating Voltage Option: 5.0V

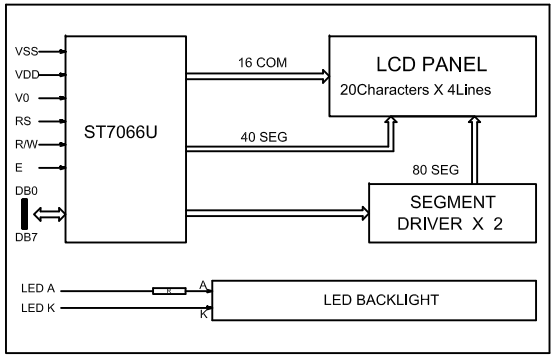

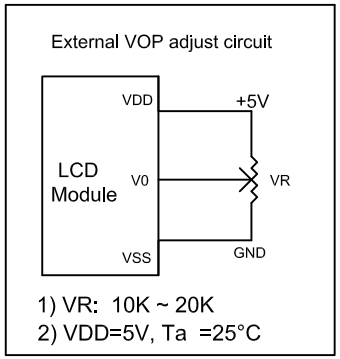

REVISION RECORD		DATE	SHENZHEN ET TECHNOLOGY CO.,LTD. HTTP:// www.eastet.com E-mail: east@eastet.com				
1			TITLE: LCM OUTLINE DIMENSION			GEN.TOL.: ±0.2	
2			Model No.: ET-C2004CV1			PRO.(3):	
3			Part No.: ET-C2004CV1			VER.:	A
4			DRAWN	OY	DATE 2011.05.26	SHEET:	1/1
5			CHECKED		DATE	UNIT:	mm
6			APPROVED		DATE	SCALE:	1:1

由 Autodesk 教育版产品制作