


DISPLAY TYPE: STN/POSITIVE YELLOW GREEN
 VIEWING DIRECTION: 6:00
 POLARIZER MODE: TRANSMISSIVE
 DRIVING METHOD: 1/65DUTY 1/9BIAS
 OPERATING VOLTAGE: 3.0±0.5V
 OPERATING TEMPERATURE: -20° ~ 70°C
 STORAGE TEMPERATURE: -30°~80°C
 LCD CONTROLLER: COG/ST7565P
 BACKLIGHT: PURE GREEN(LED)
 CUSTOMER NO: 12864
 INTERFACE : SPI-4

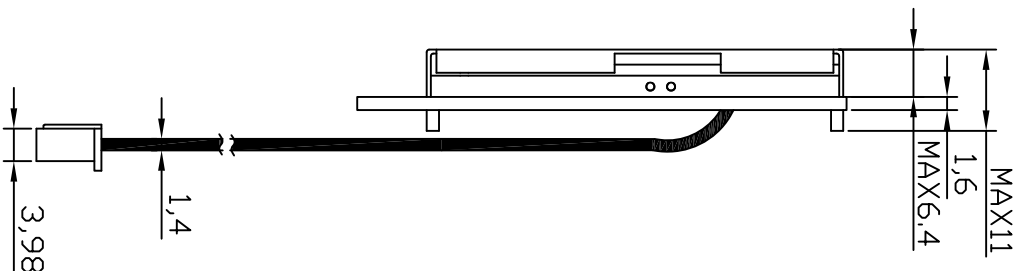

| | | | | | | | | |
|-----|-----|----|----|-----|-----|-----|------|------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| SDA | SCK | CS | RS | RST | VDD | VSS | LEDK | LEDA |

BLOCK DIAGRAM:

| REVISION RECORD | DATE | SHENZHEN ET TECHNOLOGY CO.,LTD. | |
|-----------------|-------------|-----------------------------------|-----------------|
| A | First Issue | Model No.: ET-G12864-2 | GEN.TOL.: ±0.2 |
| B | | Part No.: SPEC-ET-G12864-2-YCSWSG | VER.: A |
| C | | DRAWN OY | DATE 2011.06.21 |
| D | | CHECKED | UNIT: mm |
| E | | APPROVED | SCALE: 1:1 |