


SCALE 6:1

Pin.No	Symbol	Function
1	VDD	Power Supply
2	VSS	GND
3	V0	Operating Voltage for LCD
4	RS	H: data ; L: Instruction code
5	R/W	H: read ; L: write
6	E	Enable Signal
7-14	DB0--DB7	Data Bus

ABSOLUTE MAXIMUM RATINGS					
Item	Symbol	Min	Type	Max	Unit
Operating Voltage	VDD	4.8		5.0	V
Operating Current	IDD	-		1.8	mA
LED Voltage	VLED	2.8		3.0	V
LED Current	ILED	-		200	mA

- Description:
- 1. DISPLAY TYPE: STN POSITIVE YELLOW-GREY (1 STN NEGATIVE BLUE)
 - 2. Viewing Direction: 6 O'CLOCK
 - 3. Polarizer Mode: TRANSPARENT
 - 4. Color of Backlight: YELLOW-GREEN
 - 5. Operating Temp: -20° ~ 70° C.
 - 6. Storage Temp: -30° ~ 80° C.
 - 7. Driving condition: 1/32DUTY, 1/9BIAS, VOP=5.8V, VDD=5.0V

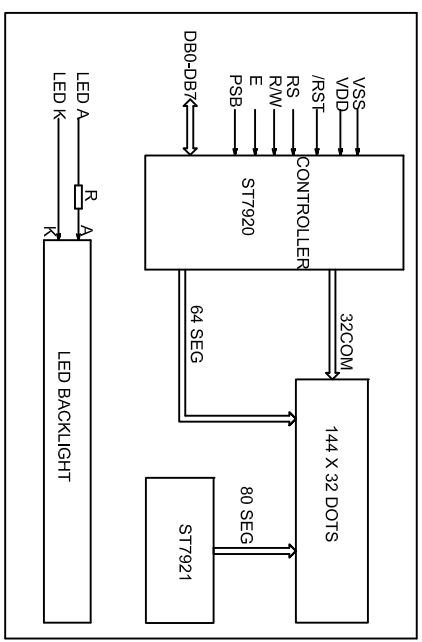

REVISION RECORD		DATE	SHENZHEN ET TECHNOLOGY CO.,LTD.
1			HTTP://www.eastel.com E-mail: east@eastel.com
2			TITLE: LCM OUTLINE DIMENSION GEN.TOL.: ±0.2
3			Model No.: ET-G14432AV1 Pro.(3):
4			Part No.: SPEC-ET-G14432AV1 VER.: A
5			DRAWN OU DATE 2010.04.17 SHEET: 1/1
6			CHECKED DATE UNIT: mm
			APPROVED DATE SCALE: 1:1