



NO.	Pin Name
1	VSS
2	A0
3	/WR
4	/RD
5	/CS
6	/RST
7	VDD
8	D0
9	D1
10	D2
11	D3
12	D4
13	D5
14	D6
15	D7
16	BLK
17	NC
18	BLA

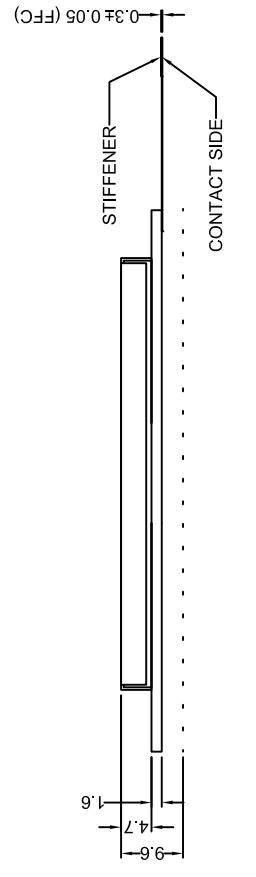

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Min	Type	Max	Unit
Supply Voltage	VDD	2.4	-	3.3	V
LCD Operating Voltage	VDD-V0	-	3.3	-	V
LED Voltage	VLED	-	-	3.3	V
LED Current	ILED	50	-	70	mA

Description	
1.DISPLAY TYPE:	FSTN Positive
2.Viewing Direction:	(6 O'CLOCK) .
3.Polarizer Mode:	Transflective
4.Color of Backlight:	White J
5. Operating voltage option :	3.3V .
6.Operating Temp:	-30° ~ 75°C.
7.Storage Temp:	-40° ~ 90C.

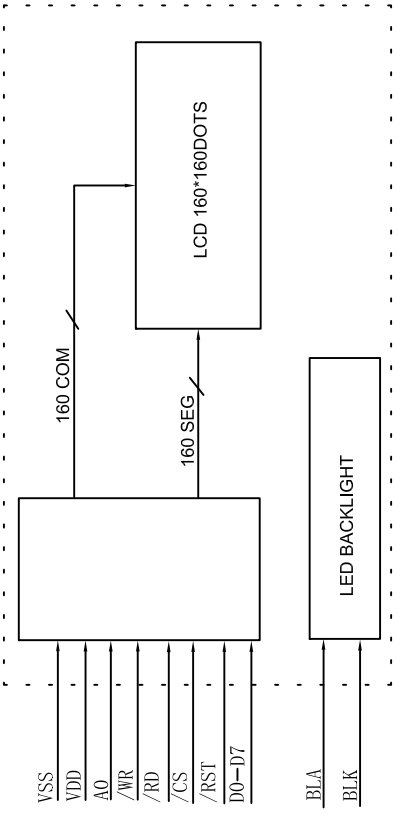

REVISION RECORD		DATE	SHENZHEN ET TECHNOLOGY CO.,LTD.	
1			HTTP:// www.easet.com	E-mail: east@easet.com
2			TITLE: LCM OUTLINE DIMENSION	
3			Model No.: ET-G160160CV1	GEN.TOL.: ±0.3
4			Part No.: SPEC-ET-G160160CV1-FBSSWSW	PRO.(3):
5			DRAWN OY	DATE 2011.07.04
6			CHECKED	DATE
			APPROVED	DATE
			VER.: A	SHEET: 1/1
				UNIT: mm
				SCALE: 1:1