



NO.	Pin Name
1	VSS
2	A0
3	/WR
4	/RD
5	/CS
6	RST
7	VDD
8	D0/SCL
9	D1
10	D2
11	D3
12	D4
13	D5
14	D6
15	D7
16	K
17	D8/SDA
18	BLA

Note:

1. Display Type: FSTN
2. View Dirction: 6 O'Clock
3. Polarizer Mode: Positive/Transflective
4. Drive Method: 1/160Duty, 1/14Bias
5. LCD drive voltage: 16.5V
6. Logic Supply Vlogic: 3.3V
7. Operating Temperature: -20°C~+70°C
8. Operating Temperature: -30°C~+80°C
9. Backlight: LED White, VBLA=3.3V, If=90mA

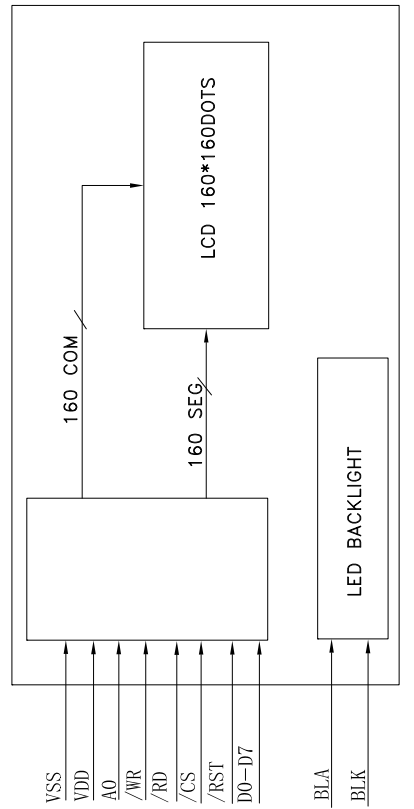

detail dots 10:1

REVISION RECORD		DATE
A	First issue	
B		
C		
D		
E		
F		

SHENZHEN ET TECHNOLOGY CO.,LTD.	
HTTP:// www.eeastet.com	E-mail: east@eastet.com
TITLE: LCM OUTLINE DIMENSION	
Model No.:	ET-G160160CV10
Part No.:	SPEC-ET-G160160CV10
DRAWN	欧阳路长
CHECKED	
APPROVED	
GEN.TOL.:	±0.2
PRO.(3):	
VER.:	A
SHEET:	1/1
UNIT:	mm
SCALE:	1:1