

D

C

B



A

D

C

B



A

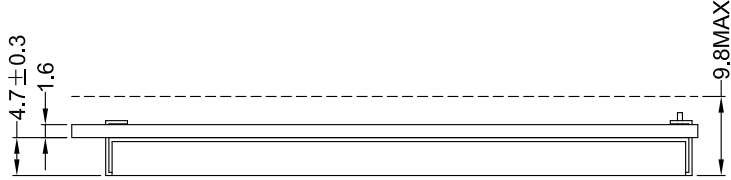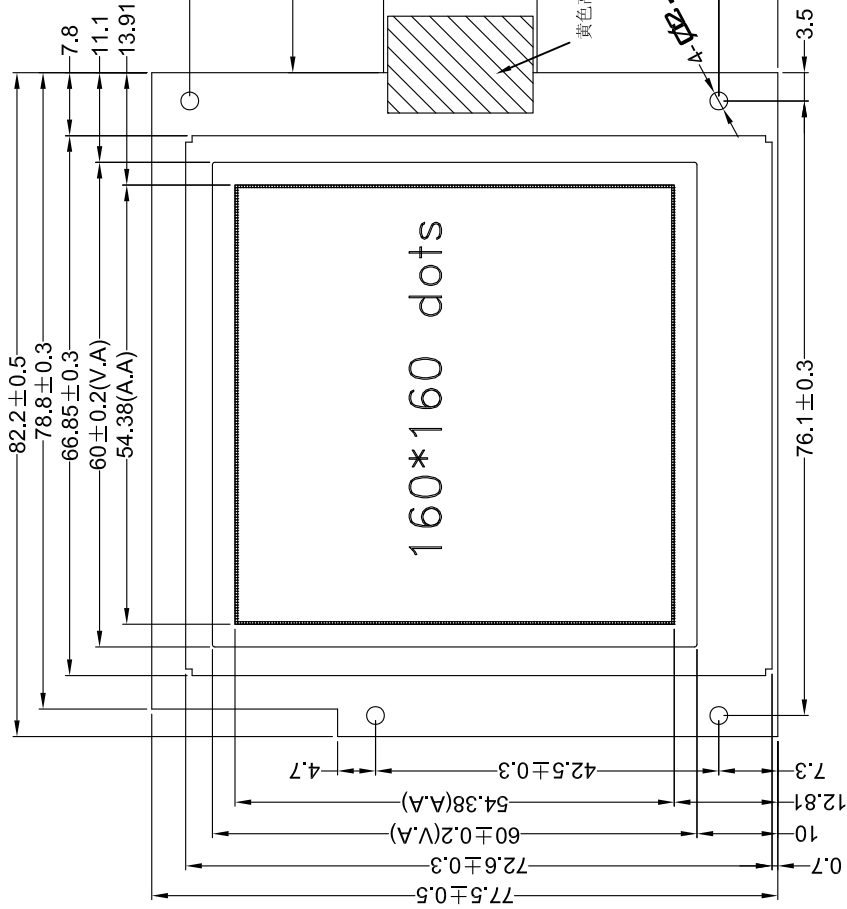


NO.	Pin Name
1	VSS
2	A0
3	/WR
4	/RD
5	/CS
6	/RST
7	VDD
8	D0
9	D1
10	D2
11	D3
12	D4
13	D5
14	D6
15	D7
16	BLK
17	NC
18	BLA

Note:

1. Display Type: FSTN
2. View Dirction: 6 0°Clock
3. Polarizer Mode: Positive/Transflective
4. Drive Method: 1/160Duty, 1/14Bias
5. LCD drive voltage: 16.5V
6. Logic Supply Voltage: 3.3V
7. Operating Temperature: -20° C ~ +70° C
8. Operating Temperature: -30° C ~ +80° C
9. Backlight: LED White, Vf=3.2V, If=90mA

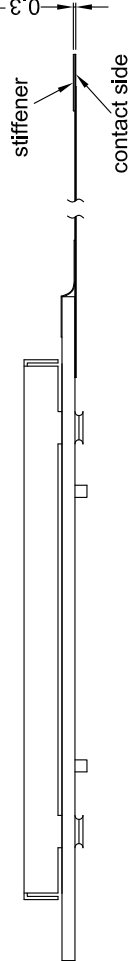

detail dots 10:1

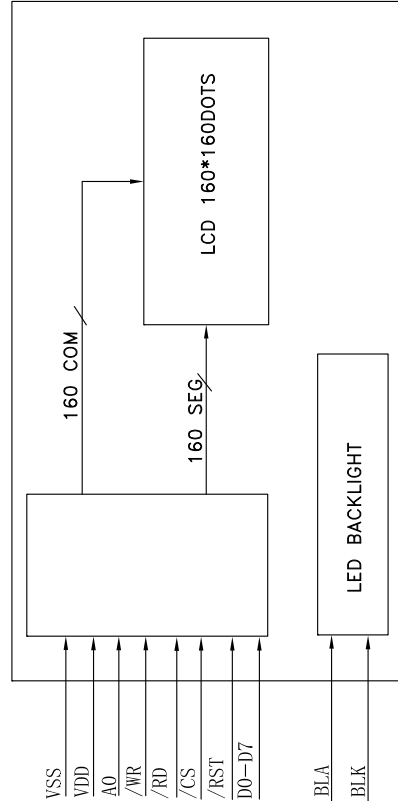

REVISION RECORD		DATE
1		
2		
3		
4		
5		
6		

SHENZHEN ET TECHNOLOGY CO.,LTD.		E-mail: east@eastet.com	
HTTP:// www.eastet.com		GEN.TOL.: ±0.2	
TITLE: LCM OUTLINE DIMENSION		PRO.(3):	
Model No.: ET-G160160CV3		VER.: A	
Part No.: SPEC-ET-G160160CV3		SHEET: 1/1	
DRAWN	OY	DATE	2011.07.20
CHECKED		DATE	
APPROVED		DATE	
UNIT: mm		SCALE: 1:1	