由 Autodesk 教育版产品制作

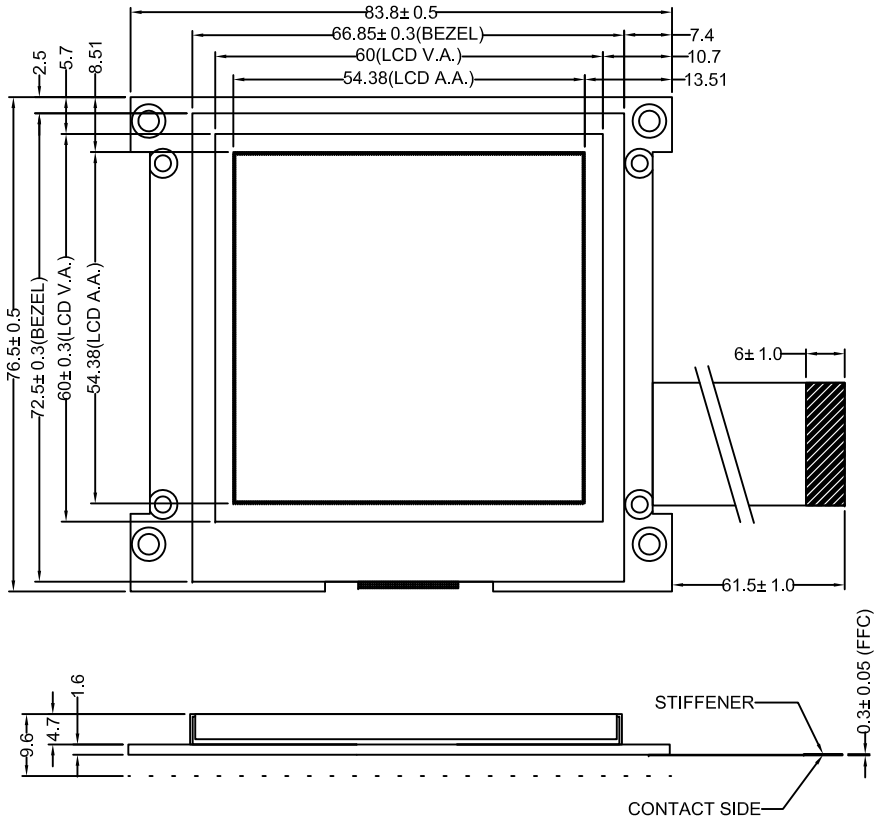

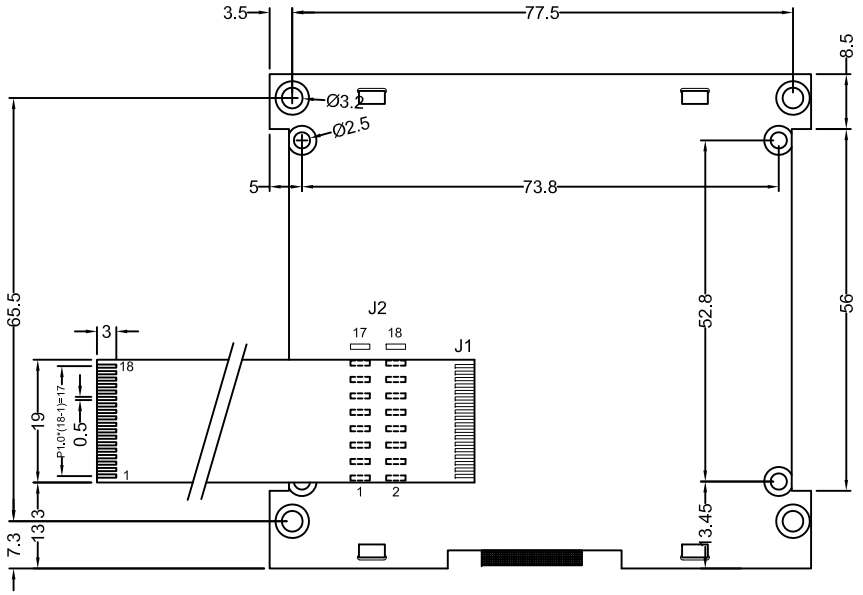



J1,J2

NO.		Pin Name
1	2	D8/SDA
3	4	VSS
5	6	D0/SCK
7	8	RST
9	10	A0
11	12	CS
13	14	VDD
15	16	BLA
17	18	BLK

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Min	Type	Max	Unit
Supply voltage	VDD	2.4	-	3.3	V
LCD Operating Voltage	VDD-V0	-	3.3	-	V
LED Voltage	VLED	-	-	3.3	V
LED Current	ILED	50		70	mA

Description
1.DISPLAY TYPE: FSTN Positive
2.Viewing Direction: (6 O'CLOCK) .
3.Polarizer Mode: Transflective
4.Color of Backlight: White ;
5. Operating voltage option : 3.3V .
6.Operating Temp: -20° ~ 70°C.
7.Storage Temp: -30° ~ 80C.

REVISION RECORD		DATE	HTTP:// www.eastet.com	SHENZHEN ET TECHNOLOGY CO.,LTD. E-mail: east@eastet.com			
1			TITLE: LCM OUTLINE DIMENSION			GEN.TOL.: ±0.3	
2			Model No.: ET-G160160CV4			PRO.(3):	
3			Part No.: SPEC-ET-G160160CV4			VER.:	A
4			DRAWN	OY	DATE 2011.09.13	SHEET:	1/1
5			CHECKED		DATE	UNIT:	mm
6			APPROVED		DATE	SCALE:	1:1

由 Autodesk 教育版产品制作