



NO.	Pin Name
1	VDD
2	/RST
3	WRO
4	/RD
5	/CS
6	A0
7	D0
8	D1
9	D2
10	D3
11	D4
12	D5
13	D6
14	D7
15	A
16	VSS

Note:

1. Display Type: FSTN
2. View Dirction: 6 O'Clock
3. Polarizer Mode: Positive/Transflective
4. Drive Method: 1/160Duty, 1/14Bias
5. LCD drive voltage: 16.5V
6. Logic Supply Vlogic: 3.3V
7. Operating Temperature: -20°C ~ +70°C
8. Operating Temperature: -30°C ~ +80°C
9. Backlight: LED White, VBLA=3.3V, If=90mA



detail dots 10:1

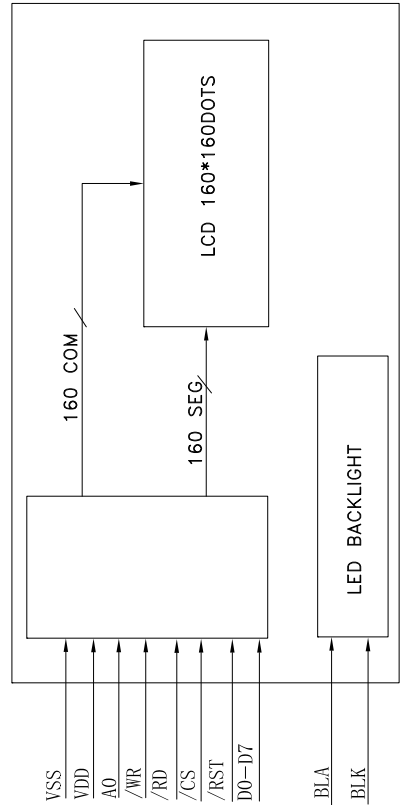

REVISION RECORD		DATE
A	First issue	
B		
C		
D		
E		
F		

SHENZHEN ET TECHNOLOGY CO.,LTD.	
HTTP:// www.eeastet.com	E-mail: east@eastet.com
TITLE: LCM OUTLINE DIMENSION	
Model No.: ET-G160160CV8	GEN.TOL.: ±0.2
Part No.: SPEC-ET-G160160CV8	PRO.(3):
DRAWN 欧阳路长	DATE 2012.06.20
CHECKED	DATE
APPROVED	DATE
	VER.: A
	SHEET: 1/1
	UNIT: mm
	SCALE: 1:1