
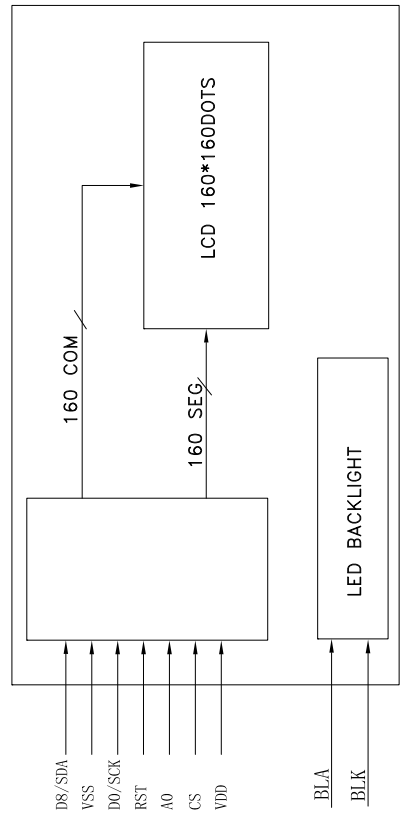


NO.	Pin Name
1	D8/SDA
3	VSS
5	D0/SCK
7	RST
9	A0
11	CS
13	VDD
15	BLA
17	BLK

- Note:
1. Display Type: FSTN
 2. View Dirction: 6 O'Clock
 3. Polarizer Mode: Positive/Transflective
 4. Drive Method: 1/160Duty, 1/14Bias
 5. LCD drive voltage: 16.5V
 6. Logic Supply Vlogic: 3.3V
 7. Operating Temperature: -20°C ~ +70°C
 8. Operating Temperature: -30°C ~ +80°C
 9. Backlight: LED White, VBLA=3.3V, If=90mA



REVISION RECORD		DATE
A	First issue	
B		
C		
D		
E		
F		

SHENZHEN ET TECHNOLOGY CO.,LTD.		E-mail: east@eastet.com	
HTTP:// www.eastet.com		GEN.TOL.: ±0.2	
TITLE: LCM OUTLINE DIMENSION		PRO.(3):	
Model No.: ET-G160160CV9	DATE	2012.06.22	1/1
Part No.: SPEC-ET-G160160CV9	CHECKED		mm
	APPROVED		1:1