由 Autodesk 教育版产品制作

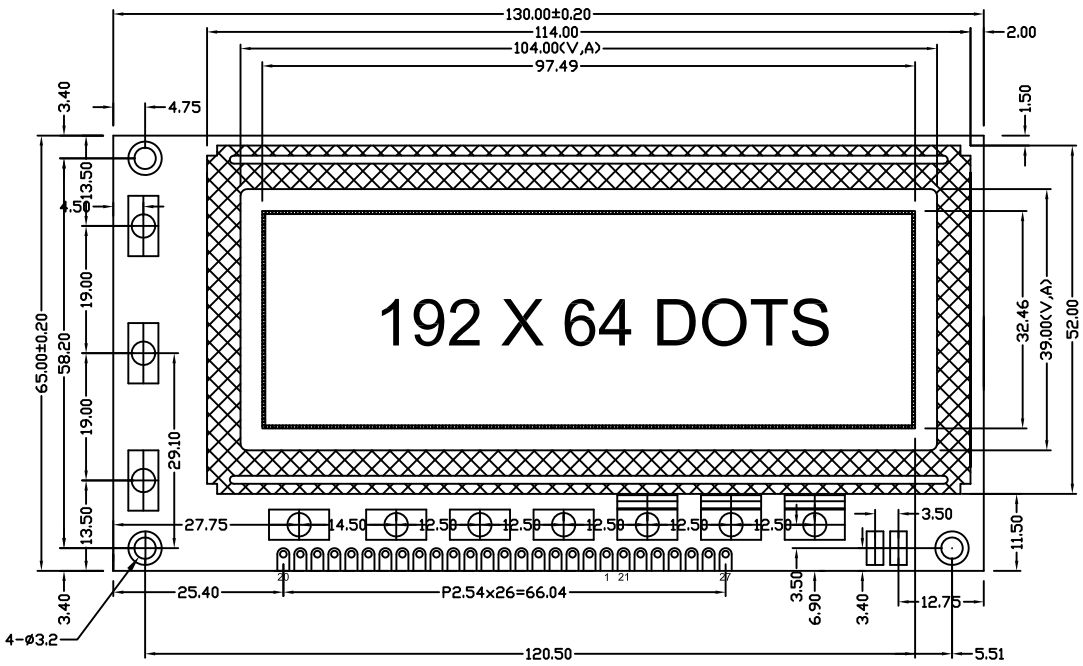

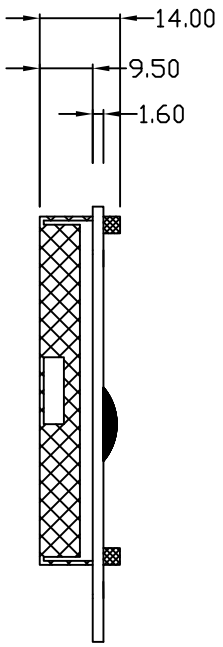

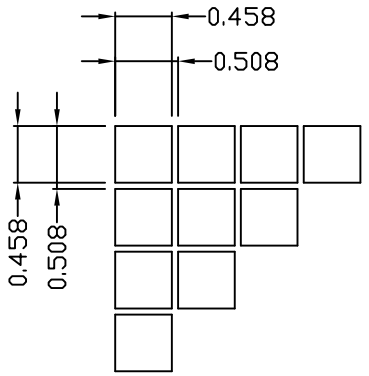

Pin.No	Symbol	Description
1	VSS	GND
2	VDD	Power supply for logic and LCD
3	V0	Operating voltage for LCD
4	RS	Data / instruction select
5	R/W	Read / write select
6	E	Enable signal
7-14	DB0–DB7	Data bus
15	/CS1	Chip select of U2 (Low effective)
16	/RST	Reset signal (Low effective)
17	/CS2	Chip select of U3 (Low effective)
18	/CS3	Chip select of U4 (Low effective)
19	Vout	Negative voltage output
20	A	Backlight anode (+3.3V)
21	KEY A	Key out
22	KEY B	Key out
23	LED1	LED out
24	LED2	LED out
25	LED3	LED out
26	PHOTOR	Photo R out
27	LED4	LED out

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Min	Type	Max	Unit
Supply voltage logic	VDD	3.2	3.3	3.4	V
LCD Operating Voltage	VDD-V0	11.8	12.5	13.85	V
LED Voltage	V_{LED}	3.2	3.3	3.4	V
LED Current (Side LED)	I_{LED}	60	70	80	mA

Description
1.DISPLAY TYPE: STN / Positive Yellow-Green; (STN / Negative Blue ; Fstn).
2.Viewing Direction: 6 O'CLOCK ; (12 O'CLOCK).
3.Polarizer Mode: Transflective ; (Transmissive ; Reflective).
4.Color of Backlight: Yellow/Green; (White).
5. Operating voltage option : 3.3V ;
6.Operating Temp: -20° ~ 70° C
7.Storage Temp: -30° ~ 80° C

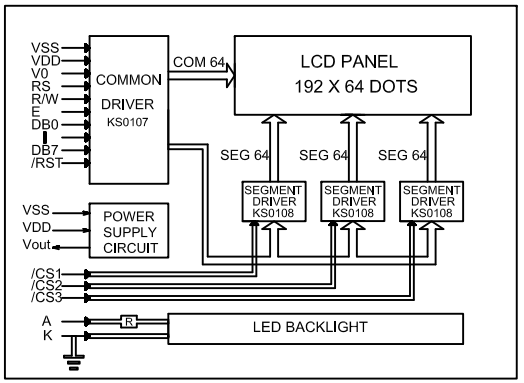

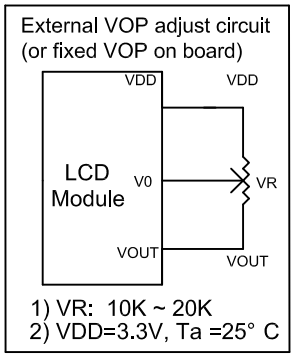

REVISION RECORD		DATE						
A	First issue		HTTP:// www.eastet.com				SHENZHEN ET TECHNOLOGY CO.,LTD.	
B			E-mail: east@eastet.com					
C			TITLE: LCM OUTLINE DIMENSION				GEN.TOL.: ±0.2	
D			Model No.: ET-G19264BV9				PRO.(3):	
E			Part No.: SPEC-ET-G19264BV9				VER.:	A
F			DRAWN	OY	DATE	2011.06.18	SHEET:	1/1
			CHECKED		DATE		UNIT:	mm
			APPROVED		DATE		SCALE:	1:1