
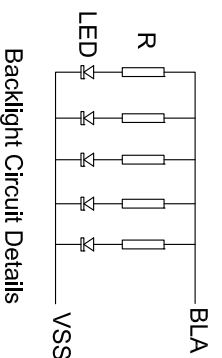

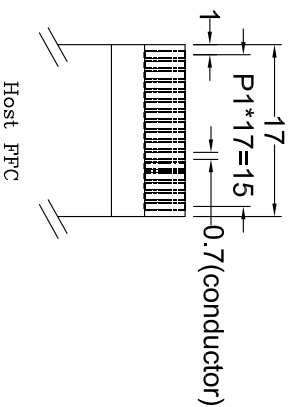


NO.	Pin Name
1	VSS
2	VDD
3	SI
4	SCL
5	A0
6	/RES
7	/CS1
8	BLA

NO.	Pin Name
1	VSS
2	VDD
3	D7
4	D6
5	D5
6	D4
7	D3 (S1)
8	D2
9	D1
10	SCL
11	NC
12	NC
13	A0
14	/RES
15	/CS1
16	BLA

NO.	Pin Name
1	VSS
2	VDD
3	D7
4	D6
5	D5
6	D4
7	D3 (S1)
8	D2
9	D1
10	D0 (SCL)
11	/RD
12	/WR
13	A0
14	/RES
15	/CS1
16	BLA

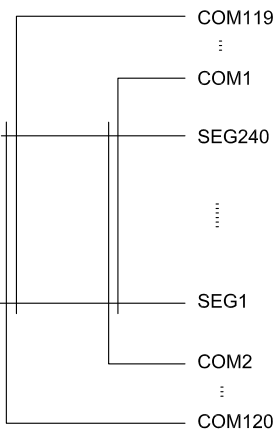

- NOTES:
1. DISPLAY TYPE: STN/BLUE
  2. LCM OPERATING VOLTAGE: 3.3V
  3. OPERATING TEMPERATURE: -20°C~70°C
  4. STORAGE TEMPERATURE: -30°C~80°C
  5. DRIVE MODE: 1/128D,1/12B,1.5,4V
  6. VIEWING DIRECTION: 12:00
  7. POLARIZER TYPE: TRANSMISSIVE,NEGATIVE
  8. CONNECTOR: FPC
  9. DRIVER IC: UC1608
  10. BACK LIGHT: 100MA(3.3V,TYP)

REVISION RECORD	DATE	DESCRIPTION
A	2011.06.30	First Issue
B	2011.07.04	Modify dimension
C		Modify dot error
D		DRAWN
E		CHECKED
F		APPROVED

Model No.:	ET-G240120AV2
Part No.:	SPEC-ET-G240120AV2
DRAWN	OY
CHECKED	
APPROVED	

SHENZHEN ET TECHNOLOGY CO.,LTD.	E-mail: east@eastel.com
GEN.TOL.: ±0.2	VER.: C
PRO.(3):	SHEET: 1/1
DATE: 2011.07.04	UNIT: mm
DATE:	SCALE: 1:1

A

B

C

D

1

2

3

4

6

7

8

A

B

C

D

1

2

3

由 Autodesk 教育版产品制作

6

7

8