由 Autodesk 教育版产品制作

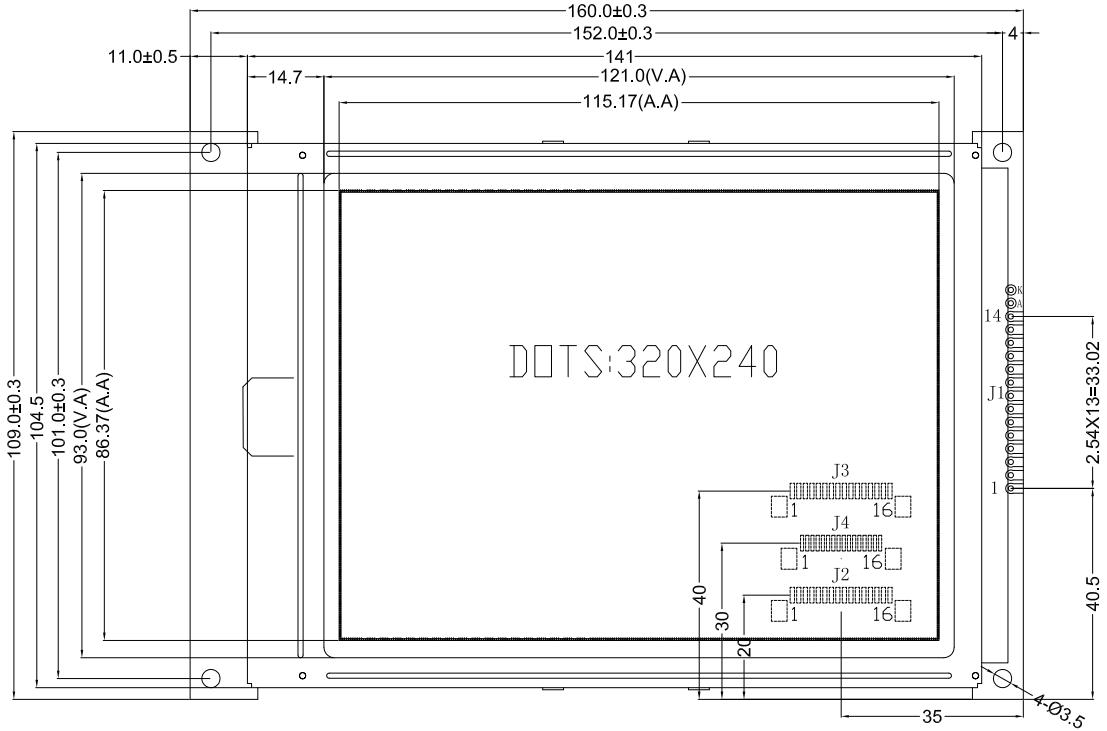





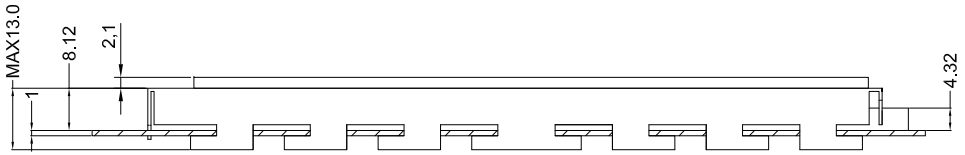

J1 (18PIN, Pitch:2.54mm)		J2 (16PIN, Pitch:1.25mm)		J3 (16PIN, Pitch:1.25mm) J4 (16PIN, Pitch:1.0mm)	
No.	Name	No.	Name	No.	Name
1	D0	1	FLM	1	D0
2	D1	2	LP	2	D1
3	D2	3	CP	3	D2
4	D3	4	M/NC	4	D3
5	/DISPOFF	5	V0	5	/DISPOFF
6	FLM	6	VDD	6	FLM
7	M/NC	7	VSS	7	M/NC
8	LP	8	VEE	8	LP
9	CP	9	D0	9	CP
10	VDD	10	D1	10	VDD
11	VSS	11	D2	11	VSS
12	VEE	12	D3	12	VEE
13	VO	13	/DISPOFF	13	VO
14	FGND	14	NC	14	FGND
		15	BLA/NC	15	LEDA/NC
		16	BLK/NC	16	LEDK/NC

1.DISPLAY TYPE: FSTN/POSITIVE;
2.VIEWING DIRECTION: 6:00;
3.POLARIZER MODE: TRANSMISSIVE;
4.DRIVING METHOD: 1/240DUTY 1/17BIAS;
5.OPERATING VOLTAGE: 3.3V;
6.OPERATING TEMPERATURE: -20° ~ 70°C;
7.STORAGE TEMPERATURE: -30°~80°C;
8.BACK LIGHT: LED/WHITE.

REVISION RECORD		DATE	SHENZHEN ET TECHNOLOGY CO.,LTD.					
			HTTP:// www.eastet.com	E-mail: east@eastet.com				
A	FIRST ISSUE		TITLE: LCM OUTLINE DIMENSION				GEN.TOL.: ±0.2	
B			Model No.: ET-G320240CV4				PRO.(3):	
C			Part No.: SPEC-ET-G320240CV4				VER.:	A
D			DRAWN	YSN	DATE	2013-11-01	SHEET:	1/1
E			CHECKED		DATE		UNIT:	mm
F			APPROVED		DATE		SCALE:	1:1