

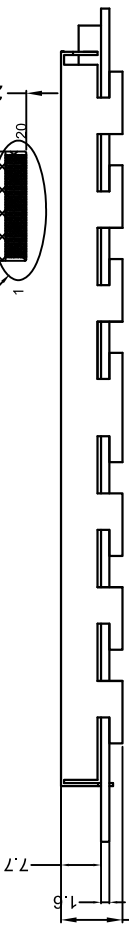


DOTS:320X240

stiffener
contact side

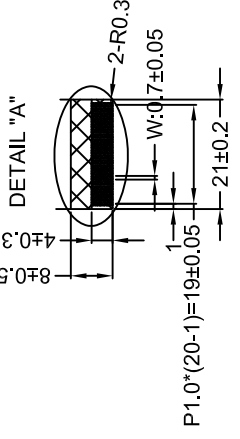

DOT SIZE



DISPLAY TYPE: STN/NEGATIVE BLUE
VIEWING DIRECTION: 6:00
POLARIZER MODE: TRANSMISSIVE
DRIVING METHOD: 1/240DUTY 1/17BIAS
OPERATING VOLTAGE: 5.0V
OPERATING TEMPERATURE: -20° ~ 70°C
STORAGE TEMPERATURE: -30° ~ 80°C
BACK LIGHT: LED/WHITE

J5 (20 PIN, Pitch: 2.54mm)		J6 (20 PIN, Pitch: 1.0mm)	
No.	Name	No.	Name
1	VSS	1	VSS
2	VDD	2	VDD
3	VO	3	VO
4	VMR	4	VMR
5	VRO	5	VRO
6	VCS	6	VCS
7	FRST	7	FRST
8	DB0	8	DB0
9	DB1	9	DB1
10	DB2	10	DB2
11	DB3	11	DB3
12	DB4	12	DB4
13	DB5	13	DB5
14	DB6	14	DB6
15	DB7	15	DB7
16	DB8	16	DB8
17	DB9	17	DB9
18	DB10	18	DB10
19	DB11	19	DB11
20	DB12	20	DB12

REVISION RECORD		SHENZHEN ET TECHNOLOGY CO.,LTD.	
DATE	DESCRIPTION	URL: http://www.easttel.com	E-mail: east@easttel.com
2012.11.7	1 First Issue	GEN.TOL.: ±0.2	PRO.Ø3:
		Model No.: ET-G320240CV5	VER.: A
		Part No.: SPEC-ET-G320240CV5	SHEET: 1/1
		DRAWN: Helen	DATE: 2012.11.7
		CHECKED:	UNIT: mm
		APPROVED:	SCALE: 1:1
		DATE:	