
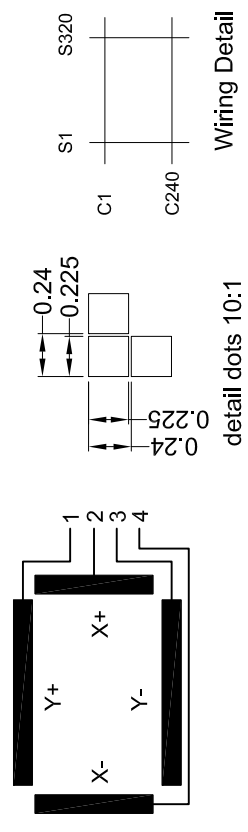


| PIN | DESC     |
|-----|----------|
| 1   | FLM      |
| 2   | M        |
| 3   | CL1      |
| 4   | CL2      |
| 5   | D-OFF    |
| 6   | DB0      |
| 7   | DB1      |
| 8   | DB2      |
| 9   | DB3      |
| 10  | VDD      |
| 11  | VSS      |
| 12  | Adj-H    |
| 13  | Adj-L    |
| 14  | NC/EL-EN |
| 15  | A        |
| 16  | K        |

| PIN | DESC |
|-----|------|
| 1   | Y+   |
| 2   | X+   |
| 3   | Y-   |
| 4   | X-   |

- Note:
1. Display Type: FSTN, Positive, Transflective
  2. View Direction: 90° Clock
  3. Drive Method: 1/240 Duty, 1/12 Bias
  4. Backlight Color: White
  5. Backlight Supply: 100mA, (5.0V typ.)
  6. Operating Voltage: 5V
  7. Operating Temperature: -10°C ~ +60°C
  8. Storage Temperature: -20°C ~ +70°C
  9. Driver IC: RA8803
  10. An external VR(25K to 50K) must be connected for Contrast Control

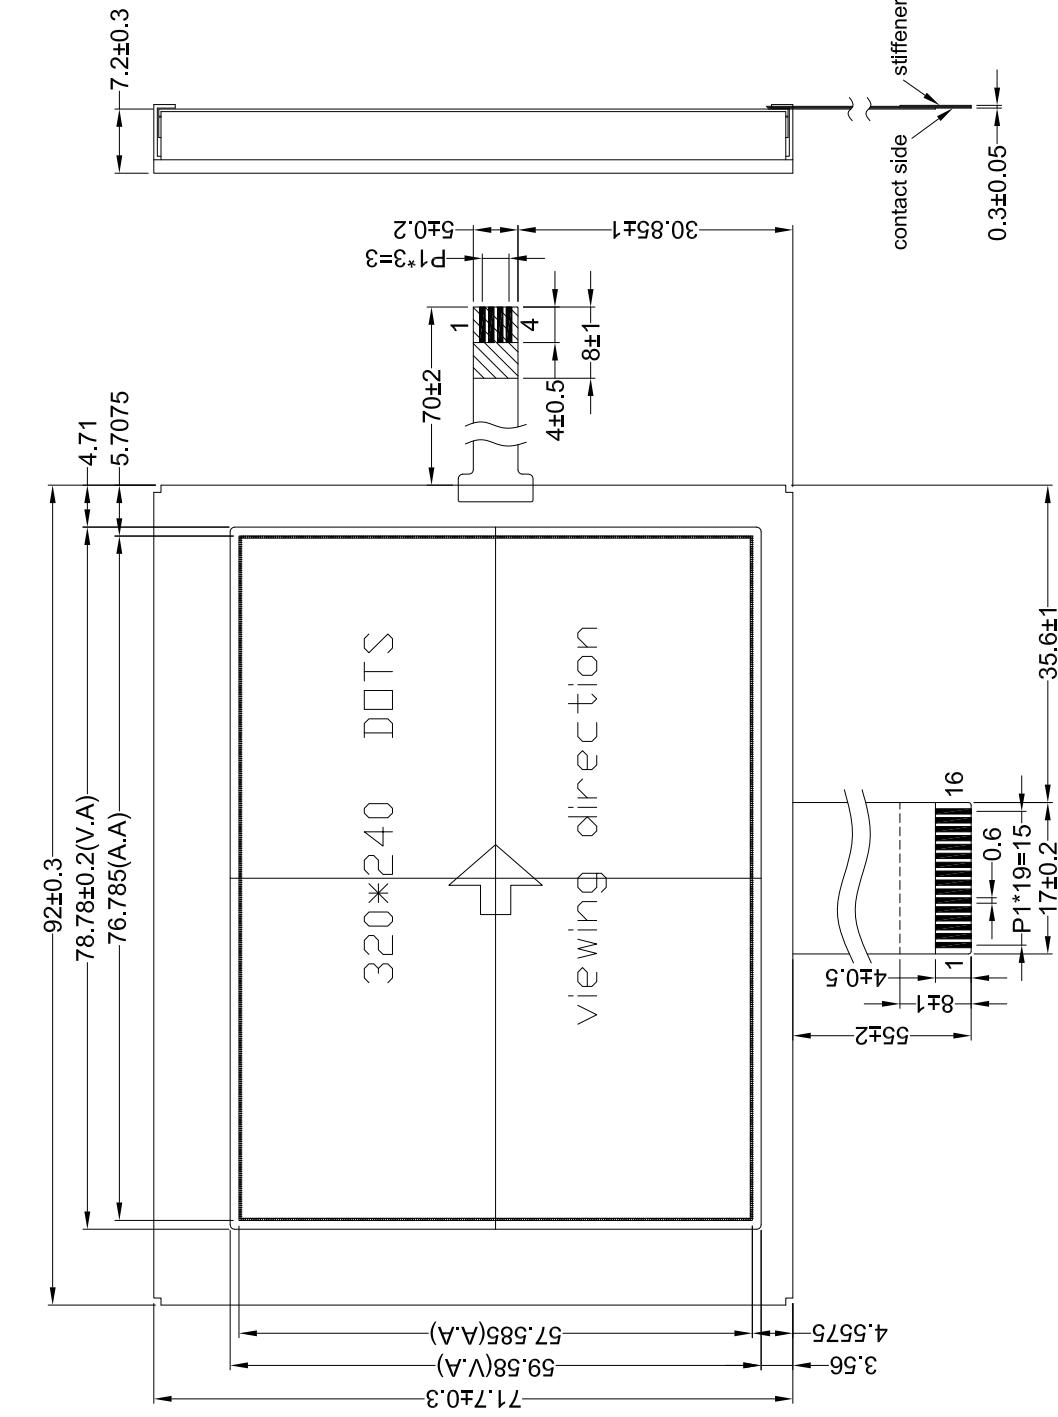

| REVISION RECORD | DATE | SHENZHEN ET TECHNOLOGY CO.,LTD.<br>E-mail: east@eastel.com |
|-----------------|------|--|
| 1               |      | GEN.TOL.:±0.2  |
| 2               |      | PRO.03: A  |
| 3               |      | VER.: 1/1  |
| 4               |      | DATE [2012.02.09]  |
| 5               |      | SHEET: 1/1   |
| 6               |      | UNIT: mm   |
|                 |      | SCALE: 1:1   |