

D

由 Autodesk 教育版产品制作

B

由 Autodesk 教育版产品制作

B



A

A

PIN	DESC
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RES
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	NC
18	VOUT
19	BLA
20	BLK

Note:

1. Display Type: FSTN, Positive, Transflective
2. View Direction: 9 0° Clock
3. Drive Method: 1/240 Duty, 1/16 Bias
4. Backlight Color: White
5. Backlight Supply: 100mA, (3.3V/5.0V typ.)
6. Operating Voltage: 3.3V/5V
7. Operating Temperature: -20°C ~ +70°C
8. Storage Temperature: -30°C ~ +80°C
9. Driver IC: RA8835

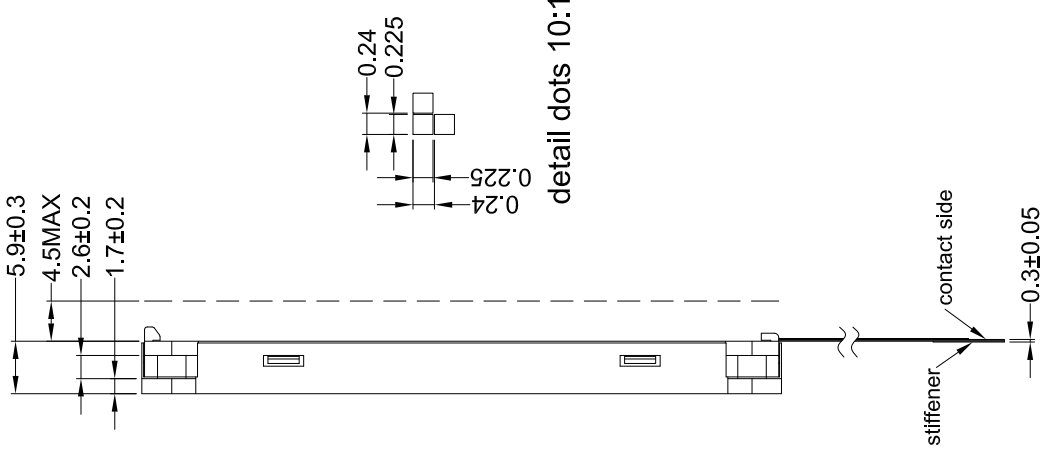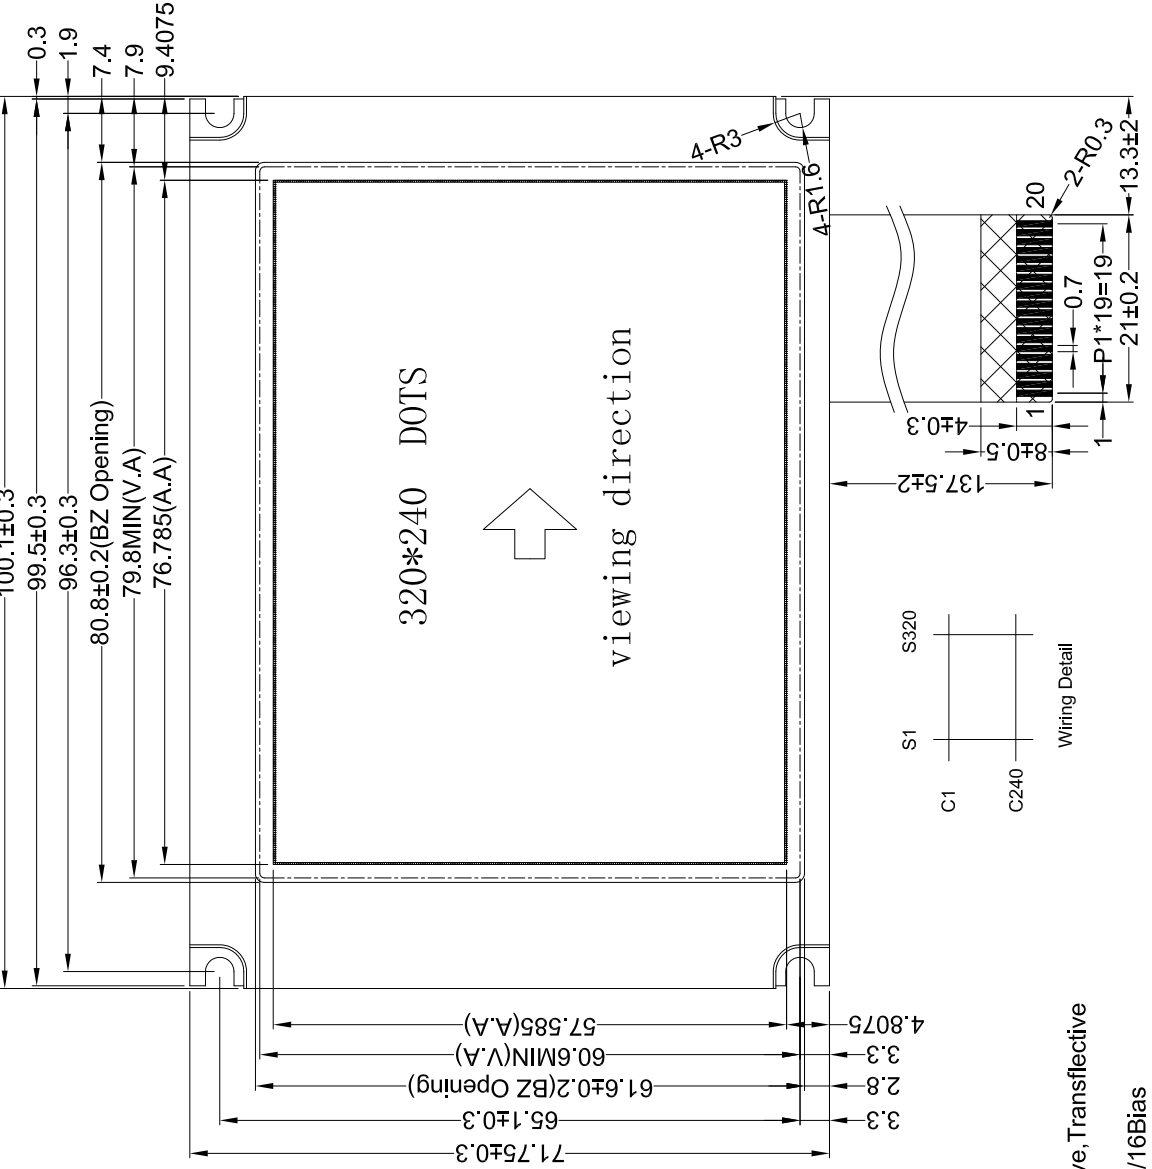

REVISION RECORD	DATE	SHENZHEN ET TECHNOLOGY CO.,LTD. E-mail: east@eastel.com
1		TITLE: LCM OUTLINE DIMENSION GEN.TOL.: ±0.2
2		Model No.: ET-G320240FV3 PRO.03:
3		Part No.: SPEC-ET-G320240FV3 VER.: A
4		DRAWN: 张阳路长 DATE: 2012.06.08 SHEET: 1/1
5		CHECKED: DATE: UNIT: mm
6		APPROVED: DATE: SCALE: 1:1