

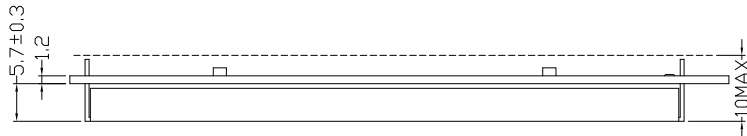


D C B A

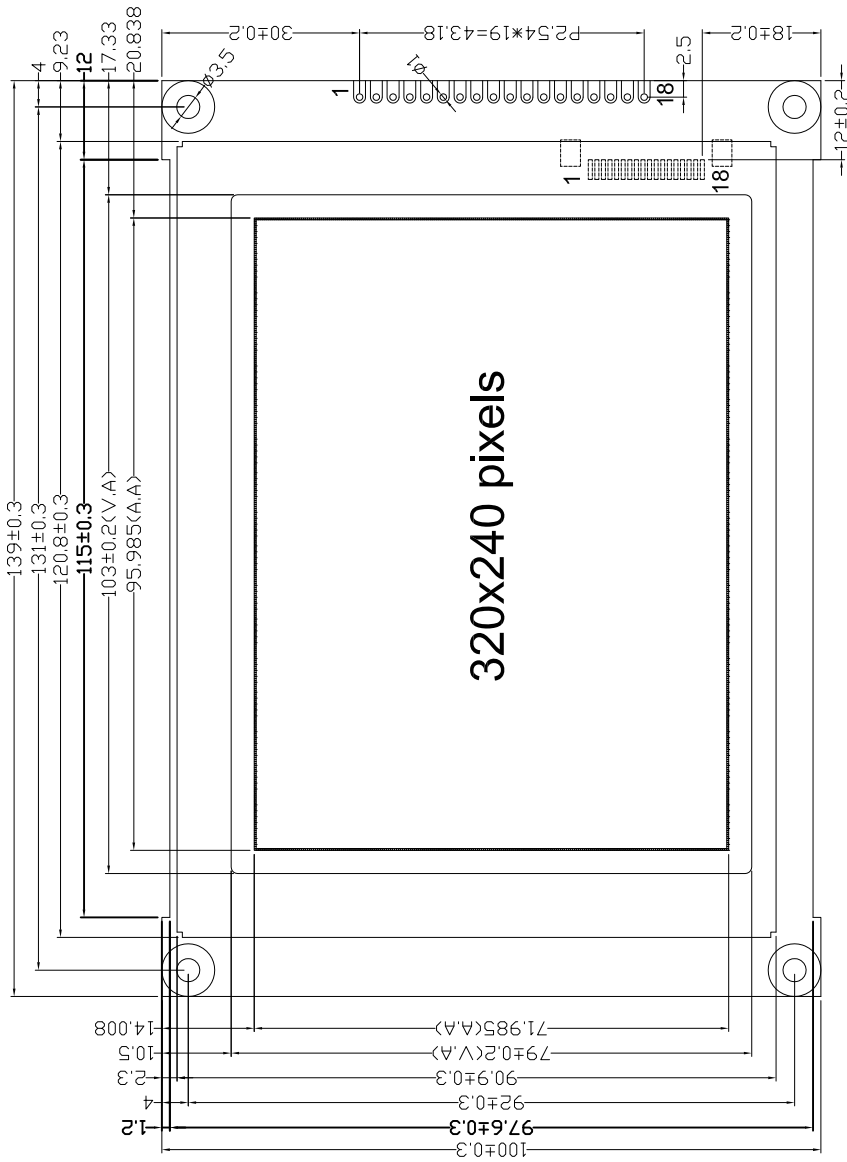

NO.	Pin Name
1	VSS
2	VDD
3	VO
4	/WR
5	/RD
6	/CS
7	AO
8	/RST
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	BLA
18	BLK



detail dot 20:1

Description	
1.DISPLAY TYPE:	STN / Positive Yellow-Green; ( STN / Negative Blue ; Fsth ).
2.Viewing Direction:	6 O'CLOCK; ( 12 O'CLOCK ).
3.Polarizer Mode:	Transflective ; ( Transmissive ; Reflective ).
4.Color of Backlight:	Yellow/Green; ( White ).
5.Driver/Controller IC:	RA8835AP3N ;
6.Operating voltage option :	5V ;
7.Operating Temp:	-20° ~ 70°C
8.Storage Temp:	-30° ~ 80°C
9.Drive method:	1/240duty, 1/14bias, Vop=21V

REVISION RECORD	DATE	SHENZHEN ET TECHNOLOGY CO.,LTD.	
A First issue		HTTP:// www.eastet.com	E-mail: eastet@eastet.com
B Modify Shape		TITLE: LCM OUTLINE DIMENSION	
C		Model No.:	ET-G320240GV1
D		Part No.:	SPEC-ET-G320240GV1
E		DRAWN	欧阳路长
F		CHECKED	
		APPROVED	
		GEN.TOL.:	±0.2
		PRO.(3):	⊕ B
		VER.:	1/1
		SHEET:	mm
		UNIT:	1:1
		SCALE:	

D C B A